

# HARKEN®

## INSTALLATION SHEET


### Wire Sheave 1.00" (25 mm)

303

1251 East Wisconsin Avenue • Pewaukee, WI 53072 U.S.A.

Telephone: (262) 691-3320 • Fax: (262) 691-3008

Harken Store: harken.com • E-mail: harken@harken.com

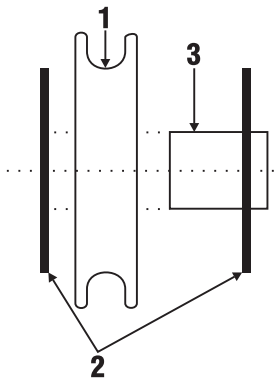

No.	Description	Sizes
1	Sheave	Max line $\frac{5}{32}$ " (4 mm), Max Wire $\frac{3}{32}$ " (2 mm)
2	Thrust Washers	2 mm, 2.5 mm
3	Spacer	3 mm

### **Maintenance**

Harken equipment is designed for minimal maintenance, but some maintenance is required to give the best service and to comply with the Harken limited warranty.

In general, the most important aspect of maintenance is to keep your equipment clean by frequently flushing with fresh water.

In corrosive atmospheres, stainless parts may show discoloration around holes, rivets and screws. This is not serious and may be removed with a fine abrasive. With the exception of winches, do not use grease unless specifically recommended in the instruction sheets.

Many Harken products are provided with specific instruction sheets that detail maintenance procedures. Instruction sheets are available at no charge by contacting Harken or a Harken distributor.

### **Warranty**

See the Harken catalog for full maintenance and warranty information.