

HARKEN®

INSTALLATION SHEET

Aluminum Deck Blocks

724, 725, 726, 1867, 1868, 6051, 6052, 6053,
6054, 6055, 6060, 6066, 6067

1251 East Wisconsin Avenue • Pewaukee, WI 53072 U.S.A.


Tel: (262) 691-3320 • Fax: (262) 691-3008 • Web: www.harken.com • E-mail: harken@harken.com



Strictly follow all instructions to avoid an accident, damage to your vessel, personal injury or death. See www.harken.com for additional safety information.

IMPORTANT MOUNTING NOTICE

You must install the enclosed MYLAR WASHERS between the stainless steel washers and the aluminum top plate. Mylar washers prevent corrosion between stainless steel and aluminum. Harken will not warranty aluminum blocks unless the stainless steel and Mylar washers are used.

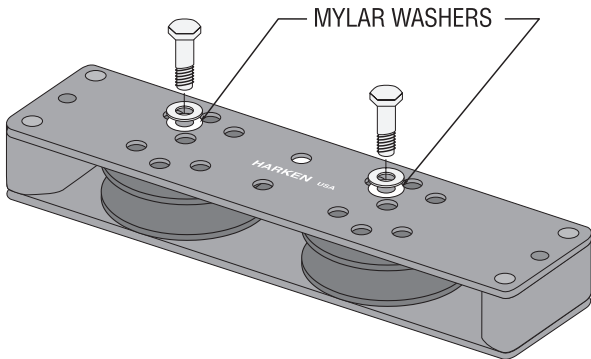

Maintenance

Harken equipment requires minimal maintenance, but some is required to give the best service and to comply with Harken's limited warranty.

It is important to keep equipment clean by frequent flushing with fresh water. In corrosive atmospheres, stainless parts may show discoloration around holes, rivets and screws. This is not serious and may be removed with a fine abrasive.

Flush blocks thoroughly with fresh water. Periodically, disassemble the blocks and clean with detergent and fresh water. Lubrication is not required, but lubricants which will not attract dirt may be used like McLube®.

Mylar® washers should always be used between stainless fasteners and aluminum sideplates. Stainless fasteners which pass through aluminum blocks should be coated with an antiseize compound.

Nylock® nuts should not be used after being removed three times. When replacing shackles and fasteners, use Harken parts to maintain the proper strength.

Big boat bearings are resistant to deformation, but it is not advisable to leave heavy loads on any hardware when the boat is not sailing.

Important: Exposure to some teak cleaners and other caustic solutions can result in discoloration of part and is not covered under the Harken warranty.

Warranty

For additional safety, maintenance and warranty information see www.harken.com or the Harken® catalog.