

HARKEN®

INSTALLATION SHEET


Splice Links

Part No: 1619, 1786, 2724

1251 East Wisconsin Avenue • Pewaukee, WI 53072 U.S.A.

Telephone: (262) 691-3320 • Fax: (262) 691-3008

Web: www.harken.com • Email: harken@harken.com

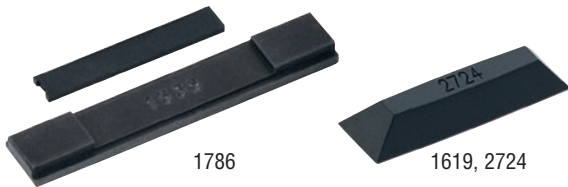

The Splice Link aligns low profile track during installation.

Installing Splice Link

1. Mount first piece of track.
2. Place plastic wedge on splice link indent so circular mark in wedge faces downward.
3. Insert splice link into mounted track. Use a hammer to lightly tap link half way into track.
4. Slide next piece of track onto splice link. Protect end of track or use a plastic hammer to tap tracks together.

NOTE: It is not necessary to use glue when using the Harken splice link.

Maintenance

Harken equipment is designed for minimal maintenance, but some maintenance is required to give the best service and to comply with the Harken limited warranty.

In general, the most important aspect of maintenance is to keep your equipment clean by frequently flushing with fresh water.

In corrosive atmospheres, stainless parts may show discoloration around holes, rivets and screws. This is not serious and may be removed with a fine abrasive.

Traveler Car/Track

Keep traveler cars clean by frequently flushing with fresh water. Periodically clean cars by squirting a detergent/water solution into the car's center openings. Roll the car back and forth to distribute evenly and then flush bearings with fresh water. This maintenance is very important, particularly when the cars haven't been in use.

Do not use spray lubricants because ball bearings may skid instead of roll. If you use a light machine oil such as 3-in-1, use only a single drop in each ball race. Too much oil attracts dirt.

Clean track with detergent and water.

Frequently inspect shackles and control block fittings for signs of fatigue. Make sure every installation includes Harken track end stops. Arrange control tackle so cars do not hit end stops under load.

Warranty

See the Harken catalog for full maintenance and warranty information.