

HARKEN®


INSTALLATION SHEET

1987/1989/3122/3194 Flip-Flop Blocks

N15W24983 Bluemound Rd., Pewaukee, WI 53072-4974 USA

Telephone: (262) 691-3320 • Fax: (262) 701-5780

Web: <http://www.harken.com> • Email: harken@harken.com

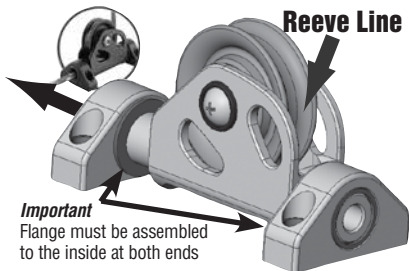

To achieve maximum working load use four (4) screws with backing plates, washers and locknuts. Use only A4 (316) or A2 (18-8) fasteners in the size listed in chart on the reverse side. Ensure deck strength is equal to block strength.



WARNING! Failure to reeve block correctly, follow faster size and type specifications or ensure deck thickness can result in track pulling off deck suddenly and unexpectedly during high loads, possibly causing severe injury or death.

Mount using (SH) Sockethead Cap Screws	
3122/3194	Use 4 – 1/4" (6 mm)
1987/1989	Use 4 – 5/16" (8 mm)

Maintenance

Harken® equipment requires minimal maintenance, but some is required to give the best service and to comply with the Harken® limited warranty.

It is important aspect to keep equipment clean by frequently flushing with fresh water. In corrosive atmospheres, stainless parts may show discoloration around holes, rivets and screws. This is not serious and may be removed with a fine abrasive.

Important! Exposure to some teak cleaners and other caustic solutions can result in discoloration of part and is not covered under the Harken warranty.

Warranty

Additional safety, maintenance, warranty information see www.harken.com/manuals or the Harken® catalog.

Printed in USA. 4277/07-12